

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 March 2005 (03.03.2005)

PCT

(10) International Publication Number
WO 2005/020258 A1

(51) International Patent Classification⁷: **H01G 9/00**, 9/052

(21) International Application Number:

PCT/JP2004/012228

(22) International Filing Date: 19 August 2004 (19.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003-296276 20 August 2003 (20.08.2003) JP
60/498,596 29 August 2003 (29.08.2003) US

(71) Applicant (for all designated States except US): **SHOWA DENKO K.K.** [JP/JP]; 13-9, Shiba Daimon 1-chome, Minato-ku, Tokyo 105-8518 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NAITO, Kazumi** [JP/JP]; c/o Corporate R & D Center, Showa Denko K.K., 1-1, Onodai 1-chome, Midori-ku, Chiba-shi, Chiba 267-0056 (JP).

(74) Agent: **OHIE, Kunihsa**; Ohie Patent Office, Selva-Ningyocho 6F, 14-6, Nihonbashi-Ningyocho, 2-chome, Chuo-ku, Tokyo 103-0013 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CHIP SOLID ELECTROLYTE CAPACITOR AND PRODUCTION METHOD OF THE SAME

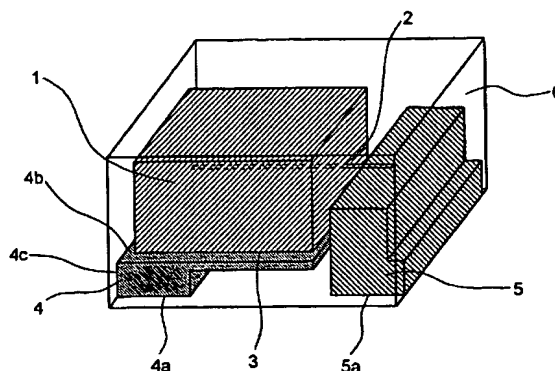

(57) Abstract: The present invention relates to a chip solid electrolyte capacitor obtained by connecting a part of the anode part and a part of the cathode part of a capacitor element to an anode terminal and a cathode terminal, respectively, and jacket-molding the capacitor element excluding a part or the whole of respective bottom faces or bottom and side faces of the anode and cathode terminals, wherein the connection face of the cathode terminal to the capacitor element is larger than the entire face of the capacitor element in the side connected to the cathode terminal, having large capacitance and low equivalent series resistance (ESR); a production method of the capacitor and an electronic device using the capacitor.